



### **Polished Chrome**

The integrity of solid brass plated in highly polished chrome for a stunning mirror smooth finish lends authenticity to modern retro designs and futuristic high tech settings.

### **Satin Nickel**

The perfect design solution for applications when both silver tones and an aura of understated sophistication are needed.



**Model:  
WL-L-210100-ZZ**

## Description



- Single Handle Lavatory Faucet
- Water Saving 2.2 GPM Aerator (1.5 GPM Available)
- Solid Handle (ADA), with Escutcheon
- Plastic Base Plate (Finished)
- ½" IPS Connector, without Supply Nut
- NSF 61-9 Certified / AB-1953 Compliant

## Compliance

- Complies with the requirements of CUPC
- Complies with NSF
- Complies with AB1953
- Complies with ASME

## Warranty

- Limited Lifetime Warranty

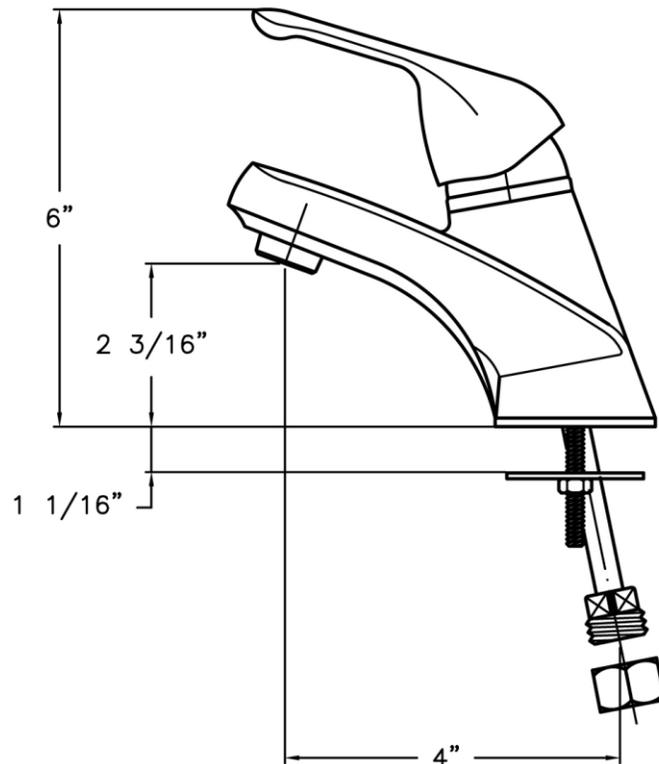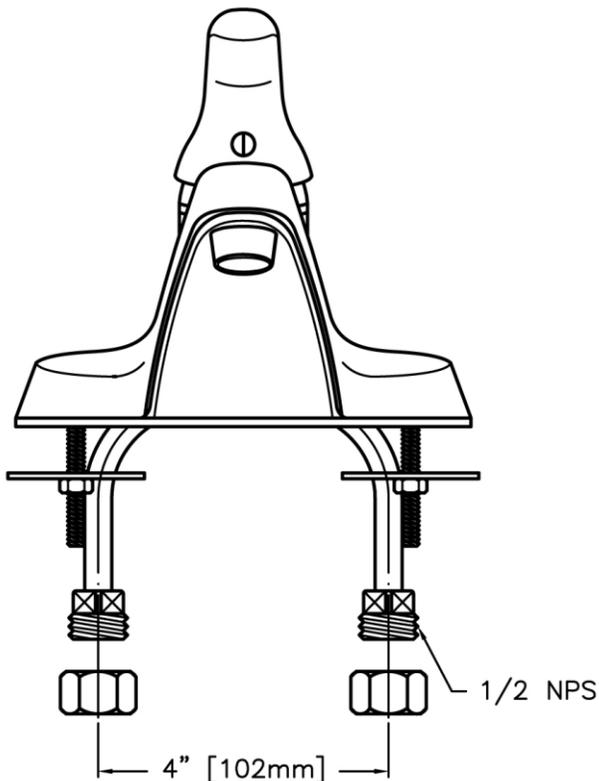

# Lavatory Single Handle



## Model: WL-L-210100-ZZ


### Available Finishes

- Chrome (CP)
- Satin Nickel (SN)


### Standards



- IAPMO UPC/CUPC
- NSF 61-9




- ASME A112.18.1



- CAAB-1953



- ADA Accessibility Guidelines

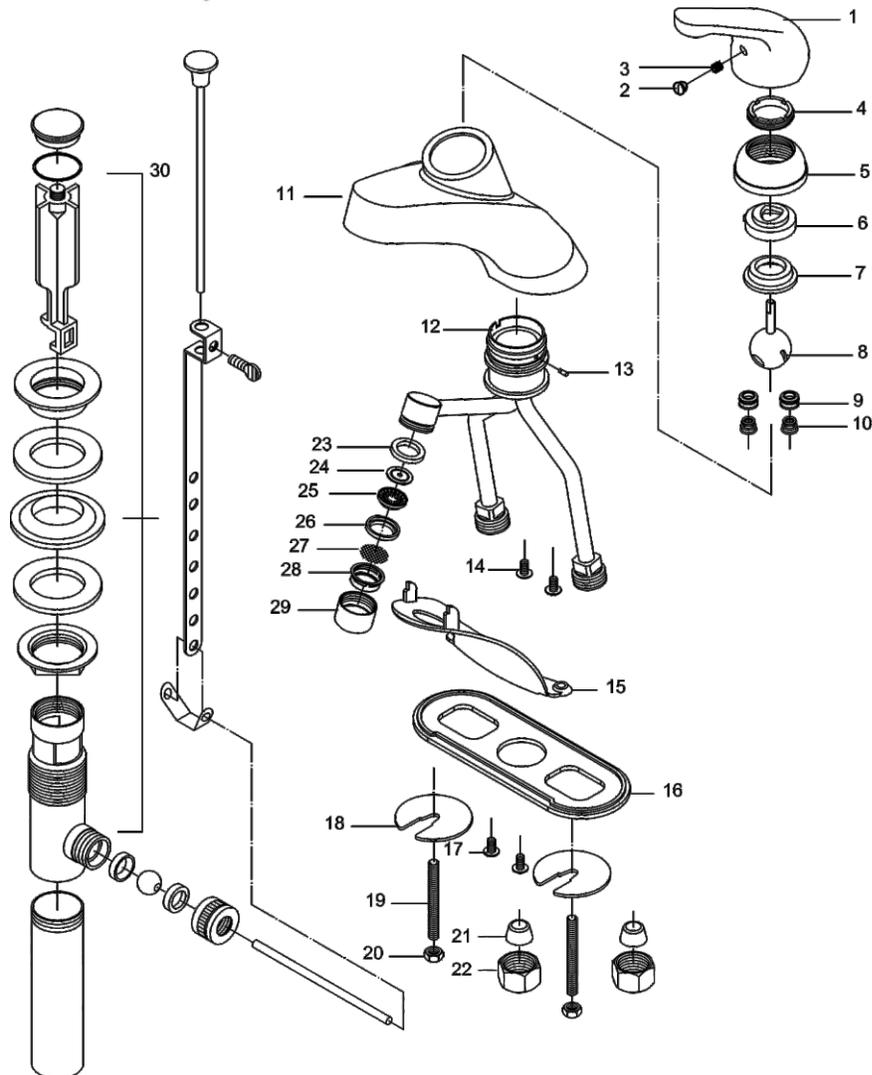

## Instruction Sheet

Please read carefully before installation.




**Model Number:**

WL-L-210100-CP

WL-L-210100-SN

1. Turn off water supply to existing faucet.
2. Remove old faucet and pop-up (if necessary).
3. Thread the inlet tubes into the body and hand tighten securely. Do not overtighten.
4. Thread 1/4"-20 mounting stud fully into the body hole closest to the center, hand-tight.
- ⚠ **Do not use a wrench on spout or inlet tubes.**
5. Install the upper lift rod into the body (if equipped).
6. If cover plate is used, secure it to faucet body with 1/4"-20 pan head screw. Install guide shanks to cover plate.

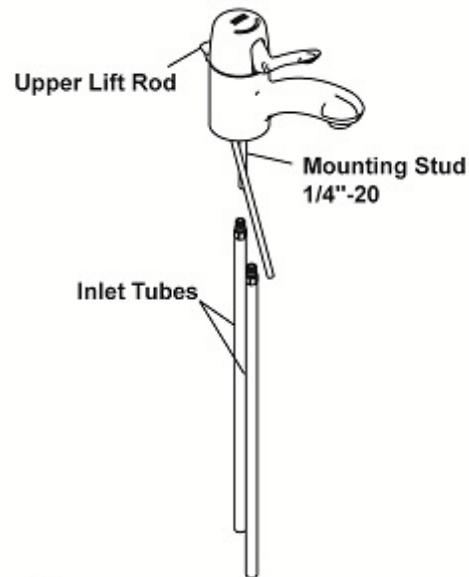

7. Place faucet and cover plate onto sink with inlet tubes through mounting hole. Use plumbers putty to seal faucet to sink. Place a ring of putty around hole openings of the sink base.

*NOTE: Use silicon sealant for porous stone or plumbers putty as recommended by counter manufacturer.*

8. Place hold-down washer (solid surface facing downward) onto mounting stud from below and secure with mounting nut finger tight.
9. Adjust faucet position as necessary, then tighten all mounting hardware.

